

## G-LHF PVC

**G-LHF PVC corner bead** for creation and protection of corners in drywall construction

**Material:**

- PVC

**Features:**

- Thin profile allows for application of thin layer of compound
- Ramp edges for smooth connection to compound
- Sharp corner for plaster finish
- Thin spot for angle adjustment
- Corner protection against mechanical damage

**Instructions for Use:**

Fasten the bead using staples and apply the compound to the area and over the bead. Application and shape adjustment must be done at the temperature of at least 10 °C (stabilized temperature of the material). Cutting (trimming) must be done using the dedicated Löwe cutter, on each wing separately.

**Packing, Storage, Transport:**



Packed in a paper box. Store and transport in a dry place at the temperature of at least 5 °C, in horizontal position.

**Certification:**

The product is not subject to any harmonized standard.  
The product was voluntarily certified by TZÚS Praha, s.p.

**Technical Data:**

Material	PVC
Arm thickness [mm]:	0,5 gradually to 1,0
Arm width [mm]	40
Length L [mm]	2500

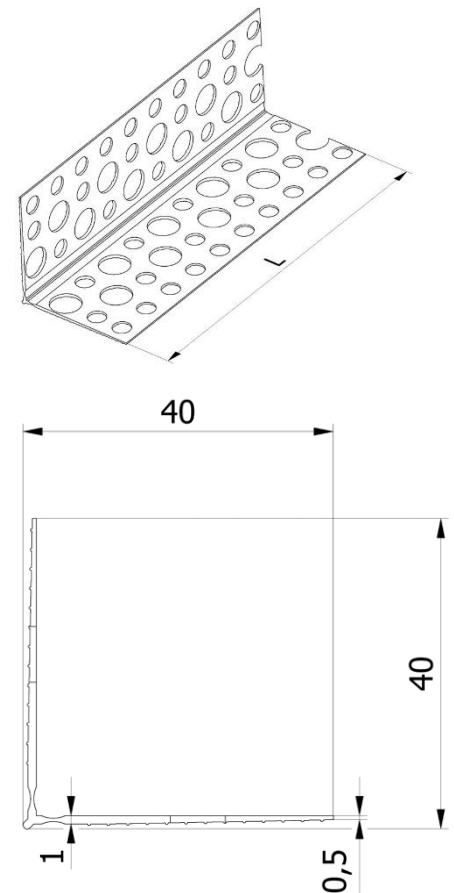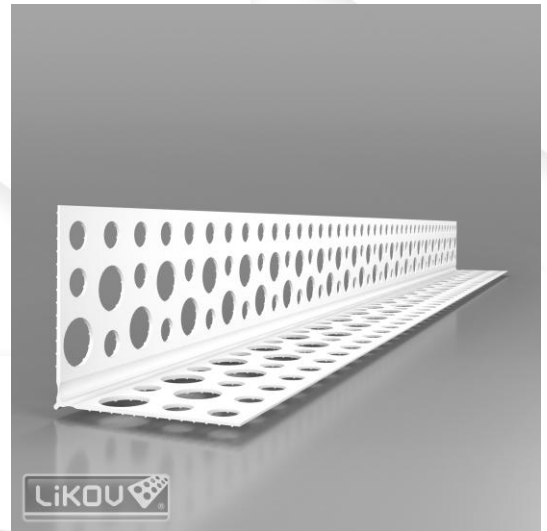

Issued on 12 September 2025.

This update invalidates all previous versions of this technical data sheet. The specified product dimensions are nominal and may range within the permitted manufacturing tolerances.